

UNIVERSITY OF MARYLAND
INSTITUTE FOR ADVANCED COMPUTER STUDIES
DEPARTMENT OF COMPUTER SCIENCE

EFFICIENT PRECONDITIONING OF THE LINEARIZED
NAVIER-STOKES EQUATIONS

CS-TR #4073 / UMIACS TR #99-66

DAVID SILVESTER[†], HOWARD ELMAN[‡], DAVID KAY[§], AND ANDREW WATHEN[§]

OCTOBER 1999

Abstract. We outline a new class of robust and efficient methods for solving subproblems that arise in the linearization and operator splitting of Navier-Stokes equations. We describe a very general strategy for preconditioning that has two basic building blocks; a multigrid V-cycle for the scalar convection-diffusion operator, and a multigrid V-cycle for a pressure Poisson operator. We present numerical experiments illustrating that a simple implementation of our approach leads to an effective and robust solver strategy in that the convergence rate is independent of the grid and the time-step, and only deteriorates very slowly as the Reynolds number is increased.

[†]Department of Mathematics, UMIST, Manchester M60 1QD

[‡]Department of Computer Science and Institute for Advanced Computer Studies, University of Maryland, College Park, MD 20742.

[§]Oxford University Computing Laboratory, Wolfson Building, Parks Road, Oxford OX1 3QD.

EFFICIENT PRECONDITIONING OF THE LINEARIZED NAVIER-STOKES EQUATIONS

DAVID SILVESTER[†], HOWARD ELMAN[‡], DAVID KAY[§], AND ANDREW WATHEN[§]

Abstract. We outline a new class of robust and efficient methods for solving subproblems that arise in the linearization and operator splitting of Navier-Stokes equations. We describe a very general strategy for preconditioning that has two basic building blocks; a multigrid V-cycle for the scalar convection-diffusion operator, and a multigrid V-cycle for a pressure Poisson operator. We present numerical experiments illustrating that a simple implementation of our approach leads to an effective and robust solver strategy in that the convergence rate is independent of the grid and the time-step, and only deteriorates very slowly as the Reynolds number is increased.

1. Introduction. The underlying goal here is to compute solutions of incompressible flow problems modelled by the Navier-Stokes equations in a flow domain $\Omega \subset \mathbf{R}^d$ ($d = 2$ or 3) with a piecewise smooth boundary $\partial\Omega$:

$$(1.1) \quad \frac{\partial \mathbf{u}}{\partial t} + \mathbf{u} \cdot \nabla \mathbf{u} - \nu \nabla^2 \mathbf{u} + \nabla p = 0 \quad \text{in } \mathcal{W} \equiv \Omega \times (0, T)$$

$$(1.2) \quad \nabla \cdot \mathbf{u} = 0 \quad \text{in } \mathcal{W}.$$

together with boundary and initial conditions of the form

$$(1.3) \quad \mathbf{u}(\mathbf{x}, t) = \mathbf{g}(\mathbf{x}, t) \quad \text{on } \overline{\mathcal{W}} \equiv \partial\Omega \times [0, T];$$

$$(1.4) \quad \mathbf{u}(\mathbf{x}, 0) = \mathbf{u}_0(\mathbf{x}) \quad \text{in } \Omega.$$

We use standard notation: \mathbf{u} is the fluid velocity, p is the pressure, $\nu > 0$ is a specified viscosity parameter (in a non-dimensional setting it is the inverse of the Reynolds number), and $T > 0$ is some final time. The initial velocity field \mathbf{u}_0 is assumed to satisfy the incompressibility constraint, that is, $\nabla \cdot \mathbf{u}_0 = 0$. The boundary velocity field satisfies $\int_{\partial\Omega} \mathbf{g} \cdot \mathbf{n} \, ds = 0$ for all time t , where \mathbf{n} is the unit vector normal to $\partial\Omega$.

If \mathbf{g} is independent of t then the usual aim is simply to compute steady-state solutions of (1.1)–(1.2). In other cases however, time-accuracy is important and the requirements of the time discretisation will be more demanding; specifically, an accurate and unconditionally stable time-discretisation method is necessary to adaptively change the timestep to reflect the dynamics of the underlying flow. We will not attempt to describe the many possibilities—the recent monographs of Gresho & Sani [14]

[†]Department of Mathematics, UMIST, Manchester M60 1QD

[‡]Department of Computer Science and Institute for Advanced Computer Studies, University of Maryland, College Park, MD 20742.

[§]Oxford University Computing Laboratory, Wolfson Building, Parks Road, Oxford OX1 3QD.

and Turek [29] are worth consulting in this respect—but will restrict attention here to the simplest unconditionally stable approach using a one-stage finite difference discretisation, as given below.

ALGORITHM 1. Given \mathbf{u}^0 , $\theta \in [1/2, 1]$, find $\mathbf{u}^1, \mathbf{u}^2, \dots, \mathbf{u}^n$ via

$$(1.5) \quad \begin{aligned} \frac{(\mathbf{u}^{n+1} - \mathbf{u}^n)}{\Delta t} + \mathbf{u}^* \cdot \nabla \mathbf{u}^{n+\theta} - \nu \nabla^2 \mathbf{u}^{n+\theta} + \nabla p^{n+\theta} &= 0 \\ \nabla \cdot \mathbf{u}^{n+\theta} &= 0 \quad \text{in } \Omega, \\ \mathbf{u}^{n+\theta} &= \mathbf{g}^{n+\theta} \quad \text{on } \partial\Omega. \end{aligned}$$

Here $\mathbf{u}^{n+\theta} = \theta \mathbf{u}^{n+1} + (1 - \theta) \mathbf{u}^n$ and $p^{n+\theta} = \theta p^{n+1} + (1 - \theta) p^n$. Note that p^0 is required if $\theta \neq 1$ so the Algorithm 1 is not self-starting in general. In this case an approximation to p^0 must be computed explicitly by manipulation of the continuum problem, or alternatively it must be approximated by taking one (very small) step of a self-starting algorithm (e.g. with $\theta = 1$ above).

Algorithm 1 contains the well known nonlinear schemes of backward Euler and Crank-Nicolson. These methods are given by $(\mathbf{u}^{n+\theta} = \mathbf{u}^{n+1}, \mathbf{u}^* = \mathbf{u}^{n+1})$, $(\mathbf{u}^{n+\theta} = \mathbf{u}^{n+\frac{1}{2}}, \mathbf{u}^* = \mathbf{u}^{n+\frac{1}{2}})$, and are first and second order accurate respectively. In either case, a nonlinear problem must be solved at every time-level. As a result neither of these methods is to be recommended if time-accuracy is needed. A well known linearization strategy is to set $\mathbf{u}^* = \mathbf{u}^n$ above. This does not affect the stability properties of the time-discretisation, but it does reduce the Crank-Nicolson accuracy to first order as $\Delta t \rightarrow 0$ (the first order accuracy of backward Euler is unchanged). To retain second order accuracy in a linear scheme the Simo-Armero scheme [24] given by setting $\mathbf{u}^{n+\theta} = \mathbf{u}^{n+\frac{1}{2}}$ with $\mathbf{u}^* = (3\mathbf{u}^n - \mathbf{u}^{n-1})/2$ in Algorithm 1 is recommended, see Smith & Silvester [26] for further details.

Using linearized backward Euler or the Simo-Armero scheme, a frozen-coefficient Navier-Stokes problem (or generalised Oseen problem) arises at each discrete time step: given a divergence-free vector field $\mathbf{w}(\mathbf{x})$ (usually referred to as the “wind”), the aim is to compute $\mathbf{u}(\mathbf{x})$ and $p(\mathbf{x})$ such that

$$(1.6) \quad \frac{1}{\Delta t} \mathbf{u} + \mathbf{w} \cdot \nabla \mathbf{u} - \nu \nabla^2 \mathbf{u} + \nabla p = \mathbf{f} \quad \text{in } \Omega$$

$$(1.7) \quad \nabla \cdot \mathbf{u} = 0 \quad \text{in } \Omega,$$

$$(1.8) \quad \mathbf{u} = \mathbf{g} \quad \text{on } \partial\Omega.$$

Notice that since (1.6)–(1.8) represents a linear elliptic PDE problem, the existence and uniqueness of a solution (\mathbf{u}, p) can be established under very general assumptions. The development of efficient methods for solving discrete analogues of (1.6)–(1.8) is the focal point of this work.

An outline is as follows. The spatial discretisation of the generalised Oseen problem is discussed in section 2. Some standard Krylov iteration methods that are applicable to the (nonsymmetric-) systems that arise after discretisation are briefly reviewed in section 3. Our general preconditioning approach is then developed in Section 4. This approach builds on our research effort over the last decade on developing effective preconditioners for limiting cases of the Oseen problem (1.6)–(1.8): specifically steady-state Stokes problems ($\Delta t \rightarrow \infty$, $\mathbf{w} \rightarrow \mathbf{0}$), see Silvester & Wathen [23]; generalised Stokes problems ($\mathbf{w} \rightarrow \mathbf{0}$), see Silvester & Wathen [22]; and steady Oseen problems ($\Delta t \rightarrow \infty$), Elman & Silvester [6], Elman [5], Kay & Loghin [15]. Some computational experiments that demonstrate the practical potential of our solution methodology are presented in sections 5. Implementation of “pure” multigrid methods seems to be relatively complicated, and performance seems to be (discretisation-) method dependent by comparison. The derivation of analytic bounds on convergence rates for the general preconditioner is an ongoing project which will be treated in a forthcoming paper [7]; in the final section we give a flavour of the analysis by quoting results that we have established in two special cases; potential flow ($\mathbf{w} = \mathbf{0}$ and $\nu = 0$) and generalised Stokes flow ($\mathbf{w} = \mathbf{0}$). These cases typically arise using time-stepping methods for (1.1)–(1.2) based on *operator splitting*—showing the inherent generality of the preconditioning approach.

2. Spatial Discretisation. Given that we would like to solve our model problem (1.6)–(1.8) over irregular geometries, the spatial discretisation will be done using finite element approximation (this also gives us more flexibility in terms of adaptive refinement via a posteriori error control, see e.g., Kay & Silvester [16]). We note that the algorithm methodology discussed in the paper applies essentially verbatim to finite difference and finite volume discretisations. In the remainder of this section we briefly review the error analysis associated with mixed finite element approximation of (1.6)–(1.8). For full details see Girault & Raviart [13].

The weak formulation of (1.6)–(1.8) is defined in terms of the Sobolev spaces $H_0^1(\Omega)$ (the completion of $C_0^\infty(\Omega)$ in the norm $\|\cdot\|_1$) and $L_0^2(\Omega)$ (the set of functions in $L^2(\Omega)$ with zero mean value on Ω). Defining a velocity space $\mathbf{X} \equiv (H_0^1(\Omega))^d$ and a pressure space $M \equiv L_0^2(\Omega)$, it is easy to see that the solution (\mathbf{u}, p) of (1.6)–(1.8) satisfies

$$(2.1) \quad \frac{1}{\Delta t}(\mathbf{u}, \mathbf{v}) + (\mathbf{w} \cdot \nabla \mathbf{u}, \mathbf{v}) + \nu(\nabla \mathbf{u}, \nabla \mathbf{v}) - (p, \nabla \cdot \mathbf{v}) = (\mathbf{f}, \mathbf{v}) \quad \forall \mathbf{v} \in \mathbf{X}$$

$$(2.2) \quad (\nabla \cdot \mathbf{u}, q) = 0 \quad \forall q \in M,$$

where (\cdot, \cdot) denotes the usual vector or scalar $L^2(\Omega)$ inner product. Since Ω is bounded

and connected there exists a constant κ satisfying the continuous *inf-sup* condition:

$$(2.3) \quad \sup_{\mathbf{w} \in \mathbf{X}} \frac{(p, \nabla \cdot \mathbf{w})}{\|\mathbf{w}\|_1} \geq \kappa \|p\| \quad \forall p \in M.$$

Furthermore, since \mathbf{w} is divergence-free, the bilinear form $c(\cdot, \cdot)$ given by

$$(2.4) \quad c(\mathbf{u}, \mathbf{v}) = \frac{1}{\Delta t}(\mathbf{u}, \mathbf{v}) + (\mathbf{w} \cdot \nabla \mathbf{u}, \mathbf{v}) + \nu(\nabla \mathbf{u}, \nabla \mathbf{v})$$

is coercive and bounded over \mathbf{X} ;

$$(2.5) \quad c(\mathbf{v}, \mathbf{v}) \geq \nu \|\nabla \mathbf{v}\|^2 \quad \forall \mathbf{v} \in \mathbf{X},$$

$$(2.6) \quad |c(\mathbf{u}, \mathbf{v})| \leq C_{\mathbf{w}} \|\nabla \mathbf{u}\| \|\nabla \mathbf{v}\| \quad \forall \mathbf{u} \in \mathbf{X}, \forall \mathbf{v} \in \mathbf{X}.$$

Existence and uniqueness of a solution to (2.1)–(2.2) then follows from a generalisation of the usual Lax-Milgram lemma, see [13].

To generate a discrete system we take finite dimensional subspaces $\mathbf{X}_h \subset \mathbf{X}$ and $M_h \subset L^2(\Omega)$, where h is a representative mesh parameter, and enforce (2.1)–(2.2) over the discrete subspaces (again specifying that functions in M_h have zero mean to ensure uniqueness). Specifically, we look for a function \mathbf{u}_h satisfying the boundary condition (1.8), and a function $p_h \in M_h$ such that

$$(2.7) \quad \frac{1}{\Delta t}(\mathbf{u}_h, \mathbf{v}) + (\mathbf{w}_h \cdot \nabla \mathbf{u}_h, \mathbf{v}) + \nu(\nabla \mathbf{u}_h, \nabla \mathbf{v}) - (p_h, \nabla \cdot \mathbf{v}) = (\mathbf{f}, \mathbf{v}) \quad \forall \mathbf{v} \in \mathbf{X}_h$$

$$(2.8) \quad (\nabla \cdot \mathbf{u}_h, q) = 0 \quad \forall q \in M_h,$$

where \mathbf{w}_h represents the interpolant of \mathbf{w} in X_h . Notice that this approximation means that the discrete wind is not actually pointwise divergence-free. From the linear algebra perspective the point is that the discrete convection matrix corresponding to the term $(\mathbf{w}_h \cdot \nabla \mathbf{u}_h, \mathbf{v})$ is *skew-symmetric*, see below.

The well-posedness of (2.7)–(2.8) is not automatic since we do not have an internal approximation. A sufficient condition for the existence and uniqueness of a solution to (2.7)–(2.8) is that the following discrete *inf-sup* condition is satisfied: there exists a constant γ independent of h such that

$$(2.9) \quad \sup_{\mathbf{v} \in \mathbf{X}_h} \frac{(q, \nabla \cdot \mathbf{v})}{\|\nabla \mathbf{v}\|} \geq \gamma \|q\| \quad \forall q \in M_h.$$

Note that the semi-norm $\|\nabla \mathbf{v}\|$ in (2.9) is equivalent to the norm $\|\mathbf{v}\|_1$ for functions $\mathbf{v} \in \mathbf{X}$. The *inf-sup* condition also guarantees optimal approximation in the sense of the error estimate

$$(2.10) \quad \|\nabla(\mathbf{u} - \mathbf{u}_h)\| + \|p - p_h\| \leq C \left(\inf_{\mathbf{v} \in \mathbf{X}_h} \|\nabla(\mathbf{u} - \mathbf{v})\| + \inf_{q \in M_h} \|p - q\| \right),$$

see [13]. Note that the constant C is inversely proportional to the *inf-sup* constant γ in (2.9).

Since we want to use linear algebra tools it is convenient to express the discrete problem (2.7)–(2.8) as a matrix problem. To do this we introduce discrete operators $\mathcal{F} : \mathbf{X}_h \mapsto \mathbf{X}_h$ and $\mathcal{B} : \mathbf{X}_h \mapsto M_h$ defined via

$$(2.11) \quad (\mathcal{F}\mathbf{v}_h, \mathbf{z}_h) = \frac{1}{\Delta t}(\mathbf{v}_h, \mathbf{z}_h) + (\mathbf{w}_h \cdot \nabla \mathbf{v}_h, \mathbf{z}_h) + \nu(\nabla \mathbf{v}_h, \nabla \mathbf{z}_h) \quad \forall \mathbf{v}_h, \mathbf{z}_h \in \mathbf{X}_h,$$

$$(2.12) \quad (\mathcal{B}\mathbf{v}_h, q_h) = (\mathbf{v}_h, \mathcal{B}^* q_h) = -(\nabla \cdot \mathbf{v}_h, q_h) \quad \forall \mathbf{v}_h \in \mathbf{X}_h, \forall q_h \in M_h,$$

so that \mathcal{B}^* is the adjoint of \mathcal{B} . With these definitions the discrete problem (2.7)–(2.8) can be rewritten as a matrix system: find \mathbf{u}_h satisfying the boundary condition (1.8) such that

$$(2.13) \quad \begin{pmatrix} \mathcal{F} & \mathcal{B}^* \\ \mathcal{B} & 0 \end{pmatrix} \begin{pmatrix} \mathbf{u}_h \\ p_h \end{pmatrix} = \begin{pmatrix} \mathbf{f} \\ 0 \end{pmatrix}.$$

Furthermore, introducing $\mathcal{A} : \mathbf{X}_h \mapsto \mathbf{X}_h$, satisfying

$$(2.14) \quad (\mathcal{A}\mathbf{v}_h, \mathbf{z}_h) = (\nabla \mathbf{v}_h, \nabla \mathbf{z}_h) \quad \forall \mathbf{v}_h, \mathbf{z}_h \in \mathbf{X}_h,$$

the inf-sup inequality (2.9) simplifies to

$$(2.15) \quad \gamma \|q_h\| \leq \sup_{\mathbf{v}_h \in \mathbf{X}_h} \frac{(\mathcal{B}\mathbf{v}_h, q_h)}{(\mathcal{A}\mathbf{v}_h, \mathbf{v}_h)^{1/2}} \quad \forall q_h \in M_h.$$

It is instructive to express (2.13) and (2.15) in terms of the actual finite element matrices that arise in practice. To this end, let us explicitly introduce the finite element basis sets, say,

$$(2.16) \quad \mathbf{X}_h = \text{span}\{\phi_i\}_{i=1}^n, \quad M_h = \text{span}\{\psi_j\}_{j=1}^m;$$

and associate the functions \mathbf{u}_h, p_h , with the vectors $u \in \mathbf{R}^n, p \in \mathbf{R}^m$ of generalised coefficients, $p_h = \sum_{j=1}^m p_j \psi_j$ etc. Defining the $n \times n$ “convection”, “diffusion” and “mass” matrices $N_{ij} = (\mathbf{w}_h \cdot \nabla \phi_i, \phi_j)$, $A_{ij} = (\nabla \phi_i, \nabla \phi_j)$ and $G_{ij} = (\phi_i, \phi_j)$, and also the $m \times n$ “divergence matrix” $B_{ij} = -(\nabla \cdot \phi_j, \psi_i)$, gives the finite element version of (2.13):

$$(2.17) \quad \begin{pmatrix} \frac{1}{\Delta t}G + N + \nu A & B^t \\ B & 0 \end{pmatrix} \begin{pmatrix} u \\ p \end{pmatrix} = \begin{pmatrix} f \\ g \end{pmatrix},$$

where the RHS term g arises from enforcement of the (non-homogeneous) boundary condition on the function \mathbf{u}_h ; see Gresho [14, pp. 440–448] for details.

Moreover, introducing the $m \times m$ pressure “mass” matrix $Q_{ij} = (\psi_i, \psi_j)$; leads to the finite element version of (2.9): for all $p \in \mathbf{R}^m$,

$$(2.18) \quad \gamma(p^t Q p)^{1/2} \leq \max_u \frac{p^t B u}{(u^t A u)^{1/2}}$$

$$(2.19) \quad = \max_{w=A^{1/2}u} \frac{p^t B A^{-1/2} w}{(w^t w)^{1/2}}$$

$$(2.20) \quad = (p^t B A^{-1} B^t p)^{1/2},$$

since the maximum is attained when $w = A^{-1/2}B^t p$. Thus, we have a characterisation of the inf-sup constant:

$$(2.21) \quad \gamma^2 = \min_{p \neq 0} \frac{p^t B A^{-1} B^t p}{p^t Q p}.$$

In simple terms it is precisely the square root of the smallest eigenvalue of the pre-conditioned Schur complement $Q^{-1}B A^{-1}B^t$. We also have that

$$(2.22) \quad (q, \nabla \cdot \mathbf{v}) \leq \|q\| \|\nabla \cdot \mathbf{v}\| \leq \sqrt{d} \|q\| \|\nabla \mathbf{v}\|$$

where $\Omega \subset \mathbf{R}^d$, and so there also exists a constant $\Gamma \leq d$ satisfying

$$(2.23) \quad \Gamma^2 = \max_{p \neq 0} \frac{p^t B A^{-1} B^t p}{p^t Q p}.$$

Note that the tight bound $\Gamma \leq 1$ was recently established (valid in the case of a conforming approximation space, $\mathbf{X}_h \subset \mathbf{X}$) by Stoyan [28].

In practice, the inf-sup condition (2.9) is extremely restrictive. Problems arise if the pressure space M_h is too rich compared to the velocity space X_h . Although many stable methods have been developed, (see [14] for a complete list of possibilities), many natural low order conforming finite element methods like Q_1-P_0 (trilinear/bilinear velocity with constant pressure) are unstable in the sense that pressure vectors $p \in M_h$ can be constructed for which the inf-sup constant tends to zero under uniform grid refinement. This type of instability can be difficult to detect in practice since the associated discrete systems (2.17) are all nonsingular—so that every discrete problem is uniquely solvable—however they become rapidly ill-conditioned as $h \rightarrow 0$.

Another issue, which needs to be addressed when applying multigrid solution techniques to convection-diffusion problems of the form

$$(2.24) \quad c(\mathbf{u}_h, \mathbf{v}) = (\mathbf{f}_h, \mathbf{v}) \quad \forall \mathbf{v} \in \mathbf{X}_h,$$

(with $c(\cdot, \cdot)$ given by (2.4)), is that standard approximation methods may produce an unstable, possibly oscillating, solution if the mesh is too coarse in critical regions. In such cases, to give additional stability on coarse meshes used in the multigrid process the discrete problem (2.24) needs to be stabilised. For example, using a *streamline-diffusion* method, we replace (2.24) by the regularised problem

$$(2.25) \quad c(\mathbf{u}_h, \mathbf{v}) + \delta(\mathbf{w}_h \cdot \nabla \mathbf{u}_h, \mathbf{w}_h \cdot \nabla \mathbf{v}) = (\mathbf{f}_h, \mathbf{v}) \quad \forall \mathbf{v} \in \mathbf{X}_h,$$

where δ is a locally defined stabilisation parameter, see Johnson [17] for further details.

The formulation (2.25) clearly has better stability properties than (2.24) since there is additional coercivity in the local flow direction. The local mesh Péclet number $P_T^\epsilon = \|\mathbf{w}_h\|_{\infty, T} h_T / \epsilon$ determines the streamline-diffusion coefficient δ_T in a given

element T via the “optimal” formula, see Fischer et al. [10];

$$(2.26) \quad \delta_T = \begin{cases} \frac{1}{2}h_T(1 - \frac{1}{P_T^\varepsilon}) & \text{if } P_T^\varepsilon > 1, \\ 0 & \text{if } P_T^\varepsilon \leq 1, \end{cases}$$

where h_T is a measure of the element length in the direction of the wind.

3. Krylov subspace solvers. Let $\mathcal{L}x = f$ denote a generic linear system of equations. Krylov subspace solution methods start with a guess $x^{(0)}$ for the solution, with residual $r^{(0)} = f - \mathcal{L}x^{(0)}$, and construct a sequence of approximate solutions of the form

$$(3.1) \quad x^{(k)} = x^{(0)} + p^{(k)}$$

where $p^{(k)}$ is in the k -dimensional *Krylov space*

$$\mathcal{K}_k(r^{(0)}, \mathcal{L}) = \text{span}\{r^{(0)}, \mathcal{L}r^{(0)}, \dots, \mathcal{L}^{k-1}r^{(0)}\}.$$

In this section, we give a brief overview of properties of Krylov subspace methods for solving the systems arising from the discretizations discussed in the previous section.

The problem (2.17) is nonsymmetric so that algorithms applicable to such problems are of primary concern, but the small Reynolds number limit leads to a symmetric indefinite Stokes problem, and we first briefly discuss this case. It is well-known that for symmetric indefinite problems, the MINRES algorithm [20] generates iterates of the form (3.1) for which the residual $r^{(k)}$ has minimal Euclidean norm. It follows that the residuals satisfy

$$\frac{\|r^{(k)}\|_2}{\|r^{(0)}\|_2} \leq \min_{\phi_k(0)=1} \max_{\lambda \in \sigma(\mathcal{L})} |\phi_k(\lambda)|,$$

where the minimum is taken over polynomials ϕ_k of degree k satisfying $\phi_k(0) = 1$. This result leads to the following bound on the relative residual norm [18].

THEOREM 3.1. *If the eigenvalues of \mathcal{L} are contained in two intervals $[-a, -b] \cup [c, d]$ with $a - b = d - c > 0$, then the residuals generated by MINRES satisfy*

$$\frac{\|r^{(k)}\|_2}{\|r^{(0)}\|_2} \leq 2 \left(\frac{1 - \sqrt{\beta}}{1 + \sqrt{\beta}} \right)^{k/2},$$

where $\beta = (bc)/(ad)$.

We apply this result to the Stokes equations in the final section. We also point out that tighter bounds can be established when $a - b \neq d - c$ and b, d have some asymptotic behaviour, see Wathen et al. [33], [34]. Each step of the computation entails only a matrix-vector product together with a small number, independent of the iteration count, of vector operations (scalar-vector products and inner products), so that the cost per step of the MINRES iteration is low.

For nonsymmetric problems, there is no Krylov subspace solver that is optimal with respect to some error norm for which the cost per step is independent of the iteration count [8, 9]. The *generalized minimal residual algorithm* (GMRES) [21] is the most efficient “optimal” solver, producing the unique iterate of the form (3.1) for which the Euclidean norm of the residual is smallest. Step k requires one matrix-vector product together with a set of k vector operations, making its cost, in terms of both operation counts and storage, is proportional to kN where N is the problem dimension. We summarize the main convergence properties of GMRES below. See [4, 21] for proofs.

THEOREM 3.2. *Let $x^{(k)}$ denote the iterate generated after k steps of GMRES, with residual $r^{(k)} = f - \mathcal{L}x^{(k)}$.*

- (i) *The residual norms satisfy $\|r^{(k)}\|_2 = \min_{\phi_k(0)=1} \|\phi_k(\mathcal{L})r^{(0)}\|_2$.*
- (ii) *If $\mathcal{L} = X\Lambda X^{-1}$ is diagonalizable, where Λ is the diagonal matrix of eigenvalues of \mathcal{L} , then*

$$\|r^{(k)}\|_2 \leq \|X\|_2 \|X^{-1}\|_2 \min_{\phi_k(0)=1} \max_{\lambda_j} |\phi_k(\lambda_j)| \|r^{(0)}\|_2.$$

Assertions (i) and (ii) follow from the optimality of GMRES with respect to the residual norm. Assertion (i) guarantees that GMRES will solve any nonsingular problem provided that the dimensions of the Krylov space is large enough. This differentiates GMRES from most other nonsymmetric Krylov subspace methods.

The GMRES iterate is computed as in (3.1) with $p^{(k)}$ of the form $p^{(k)} = V_k y^{(k)}$, where V_k is a matrix whose columns form an orthogonal basis for \mathcal{K}_k . The construction of the orthogonal basis is what makes the cost per step high, but once such a basis is available, the iterate with smallest residual norm can be computed cheaply. See [21] for details. Nonoptimal methods compromise on these points, reducing the cost per step by avoiding the construction of an orthogonal basis, but thereby making the construction of an optimal iterate too expensive. (See the discussion of (3.2) below.) Numerous methods of this type have been proposed, see for example, [11, 25, 27, 30], and this remains an active area of research; we outline the properties of one such approach, the *quasi-minimum residual algorithm* (QMR) [11]

QMR is a *biorthogonalization* method: it constructs a basis for $\mathcal{K}_k(r^{(0)}, \mathcal{L})$, as well as a basis for an alternative space $\mathcal{K}_k(\hat{r}^{(0)}, \mathcal{L}^t)$, such that the two basis sets are pairwise mutually orthogonal. That is, if the basis vectors for $\mathcal{K}_k(r^{(0)}, \mathcal{L})$ are stored as the columns of a matrix V_k and the basis for $\mathcal{K}_k(\hat{r}^{(0)}, \mathcal{L}^t)$ is stored in W_k , then $V_k^t W_k = I_k$. The vector $\hat{r}^{(0)}$ may be arbitrary. The iteration (3.1) again uses $p^{(k)} = V_k y^{(k)}$. It can be shown that the residual satisfies

$$(3.2) \quad r^{(k)} = V_{k+1} \left(\|r^{(0)}\|_2 \epsilon_1 - T_k y^{(k)} \right)$$

where e_1 is the unit vector of size $k + 1$ and T_k is a tridiagonal matrix of dimensions $(k + 1) \times k$. Minimizing $\|r^{(k)}\|_2$ requires the solution of the least squares problem associated with (3.2), which is prohibitively expensive ($O(k^2 N)$ operations). The QMR iterate is defined by the choice of $y^{(k)}$ that solves

$$\min_{y^{(k)}} \left\| \|r^{(0)}\|_2 e_1 - T_k y^{(k)} \right\|_2,$$

even though the columns of V_{k+1} are not orthogonal.¹ Because T_k is tridiagonal, this construction can be done with a fixed number of vector operations at each step, together with matrix-vector products by \mathcal{L} and \mathcal{L}^t .

As described, this algorithm may not be as robust as GMRES. In particular, it may happen that it is not possible to augment the basis for $\mathcal{K}_k(r^{(0)}, \mathcal{L})$ at some step k , even though the solution has not been obtained via (3.1). A more robust version of QMR that makes breakdown of this type unlikely is given in [11]. If breakdown does not occur, then the QMR iterate satisfies the following convergence bound.

THEOREM 3.3. *Let $x^{(k)}$ denote the iterate generated after k steps of QMR, with residual $r^{(k)} = f - Ax^{(k)}$, and let $r_{GMRES}^{(k)}$ denote the residual produced by k steps of GMRES. Then*

$$\|r^{(k)}\|_2 \leq \|V_{k+1}\|_2 \|r_{GMRES}^{(k)}\|_2 \leq \sqrt{k+1} \|r_{GMRES}^{(k)}\|_2.$$

The results of Theorems 3.1–3.3 indicate that if the eigenvalues of \mathcal{L} are tightly clustered, then convergence will be rapid. In particular, for MINRES, it is desirable for the sizes of the two intervals (one on each side of the origin) to be as small as possible, and well separated from the origin. For GMRES and QMR, Theorem 3.2 (ii) suggests that convergence will be fast if the eigenvalues can be enclosed in a region in the complex plane that is small. The spectra of the discrete problems of Section 2 are not well-behaved in this sense, and convergence must be enhanced by preconditioning. That is, we use an operator $\mathcal{P} \approx \mathcal{L}$ and solve an equivalent system such as $\mathcal{P}^{-1}\mathcal{L}x = \mathcal{P}^{-1}b$, with a more favorable distribution of eigenvalues, by Krylov subspace iteration.

We conclude this section with a few general observations concerning preconditioning for both symmetric indefinite and nonsymmetric problems. Sections 4 and 6 discuss and analyze some specific strategies suitable for (2.17). First, we note that preconditioning increases the cost per step, since the matrix-vector product now requires a preconditioning operation, i.e. application of the action of \mathcal{P}^{-1} to a vector. Thus, for the preconditioner to be effective, the improved convergence speed must be enough to compensate for the extra cost.

¹GMRES uses a construction essentially of this type, and optimality is achieved because of orthogonality of the basis.

The MINRES algorithm can be combined with preconditioning by a symmetric positive-definite operator \mathcal{P} . Formally, MINRES is then applied to the symmetric matrix $\hat{\mathcal{L}} = \mathcal{S}^{-1}\mathcal{L}\mathcal{S}^{-T}$, where $\mathcal{P} = \mathcal{S}\mathcal{S}^t$. The error bound analogous to that of Theorem 3.1 is

$$(3.3) \quad \frac{\|r^{(k)}\|_{\mathcal{P}^{-1}}}{\|r^{(0)}\|_{\mathcal{P}^{-1}}} \leq 2 \left(\frac{1 - \sqrt{\beta}}{1 + \sqrt{\beta}} \right)^{k/2},$$

where the intervals defining β now come from the eigenvalues of the preconditioned operator $\hat{\mathcal{L}}$. Thus, we seek a preconditioner for which the computation of the action of \mathcal{P}^{-1} is inexpensive, and for which the eigenvalues of $\hat{\mathcal{L}}$ are tightly clustered, leading to smaller β . Note also that the norm in (3.3) is now different; for further details see [22]. It is also possible to apply QMR to symmetric indefinite problems and combine this with a symmetric indefinite preconditioner; see [12].

For nonsymmetric problems, there is some flexibility in how the preconditioned problem may be formulated, with three possible different “orientations”:

$$\begin{aligned} \text{Left orientation} & \quad [\mathcal{P}^{-1}\mathcal{L}][x] = [\mathcal{P}^{-1}f]; \\ \text{Two-sided orientation} & \quad [\mathcal{P}_1^{-1}\mathcal{L}\mathcal{P}_2^{-1}][\mathcal{P}_2x] = [\mathcal{P}_2^{-1}f]; \\ \text{Right orientation} & \quad [\mathcal{L}\mathcal{P}^{-1}][\mathcal{P}x] = [f]. \end{aligned}$$

The two-sided orientation depends on having an explicit representation of the preconditioner in factored form $\mathcal{P} = \mathcal{P}_1\mathcal{P}_2$. In our experience, there is little difference in the effectiveness of these choices. We tend to prefer the “right” variant, especially for use with GMRES, since the norm being minimized (the Euclidian norm of the residual) is then independent of the choice of the preconditioner.

4. Preconditioning strategy. Our starting point is the discrete system $\mathcal{L}x = f$ associated with (2.17), which we write in the form

$$(4.1) \quad \begin{pmatrix} F & B^t \\ B & 0 \end{pmatrix} \begin{pmatrix} u \\ p \end{pmatrix} = \begin{pmatrix} f \\ g \end{pmatrix}$$

so that $F = \frac{1}{\Delta t}G + N + \nu A \in \mathbf{R}^{n \times n}$, with $B \in \mathbf{R}^{m \times n}$. Our preconditioning strategy is based on the assumption that a fast solver (typically based on multigrid) is available for the convection-diffusion system $Fu = f$. This leads us to consider a block triangular preconditioning

$$(4.2) \quad \mathcal{P}^{-1} = \begin{pmatrix} F^{-1} & R \\ 0 & -S^{-1} \end{pmatrix},$$

with matrix operators $R \in \mathbf{R}^{n \times m}$ and $S \in \mathbf{R}^{m \times m}$ chosen to provide clustering of the eigenvalues $\sigma(\mathcal{L}\mathcal{P}^{-1})$ of the right preconditioned system

$$(4.3) \quad \mathcal{L}\mathcal{P}^{-1} = \begin{pmatrix} I_n & FR - B^tS^{-1} \\ BF^{-1} & BR \end{pmatrix}.$$

THEOREM 4.1. *The specific choice of R and S in (4.2) satisfying*

$$FR - B^t S^{-1} = O, \quad BR = I_m,$$

that is, $R = F^{-1}B^t S^{-1}$ with $S = BF^{-1}B^t$, is the optimal choice, see Murphy et al. [19]. For this choice, it follows from (4.3) that $\sigma(\mathcal{L}\mathcal{P}^{-1}) = \{1\}$, and preconditioned GMRES converges to the solution of (4.1) in at most two iterations.

Implementation of a right preconditioner for GMRES requires the solution of a system of the form $\mathcal{P}y = r$ at every step. (QMR also requires the solution of a system with \mathcal{P}^t .) With the optimal choice of R and S we need to compute the vector $\begin{pmatrix} v \\ q \end{pmatrix}$ satisfying

$$(4.4) \quad \begin{pmatrix} v \\ q \end{pmatrix} = \begin{pmatrix} F^{-1} & F^{-1}B^t S^{-1} \\ 0 & -S^{-1} \end{pmatrix} \begin{pmatrix} r \\ s \end{pmatrix},$$

for given vectors $r \in \mathbf{R}^n$, and $s \in \mathbf{R}^m$. Rewriting (4.4) shows that the optimal preconditioner is defined by a two-stage process:

$$(4.5) \quad \begin{aligned} &\text{Solve for } q : \quad Sq = -s; \\ &\text{Solve for } v : \quad Fv = r - B^t q. \end{aligned}$$

To get a practical method, we modify the preconditioning process (4.5) by replacing the matrix operators $S = BF^{-1}B^t$ and F , by approximations S_* and F_* respectively, designed so that the preconditioned Oseen operator has a tightly clustered spectrum. We are particularly interested in operators S_* and F_* derived from multigrid computations such that $\sigma(SS_*^{-1}) \in \omega_S$ and $\sigma(F_*F_*^{-1}) \in \omega_F$ where ω_S and ω_F represent small convex sets in the right half of the complex plane; ideally, these sets would be independent of the problem parameters ν , h , and Δt .

The construction of the operator $F_* \approx F$ is relatively straightforward, see section 5. The more difficult issue is the construction of a simple multigrid approximation to the Schur complement $BF^{-1}B^t$, see e.g. Turek [29, pp. 56]. The approach presented here was developed by Kay & Loghin [15] and represents an improved version of ideas in Elman & Silvester [6] and Elman [5].

To motivate the derivation, suppose for the moment that we have an unbounded domain, and that differential operators arising in (1.6)–(1.8) commute:

$$(4.6) \quad \nabla(1/\Delta t + \mathbf{w} \cdot \nabla - \nu \nabla^2)_p \equiv (1/\Delta t + \mathbf{w} \cdot \nabla - \nu \nabla^2)_{\mathbf{u}} \nabla$$

where for any operator Θ , $\Theta_{\mathbf{u}}$ represents the vector analogue of the scalar operator Θ_p . If we further assume that a C^0 pressure approximation is used (so that $M_h \subset H^1(\Omega)$) then we can construct a discrete pressure convection-diffusion operator $\mathcal{F}_p : M_h \mapsto M_h$ such that

$$(4.7) \quad (\mathcal{F}_p q_h, r_h) = \frac{1}{\Delta t}(q_h, r_h) + (\mathbf{w}_h \cdot \nabla q_h, r_h) + \nu(\nabla q_h, \nabla r_h) \quad \forall q_h, r_h \in M_h.$$

Introducing the L_2 -projection operators $\mathcal{G} : \mathbf{X}_h \mapsto \mathbf{X}_h$ and $\mathcal{Q} : M_h \mapsto M_h$

$$\begin{aligned} (\mathcal{G}\mathbf{v}_h, \mathbf{z}_h) &= (\mathbf{v}_h, \mathbf{z}_h) & \forall \mathbf{v}_h, \mathbf{z}_h \in \mathbf{X}_h, \\ (\mathcal{Q}q_h, r_h) &= (q_h, r_h) & \forall q_h, r_h \in M_h, \end{aligned}$$

then gives the discrete analogue of (4.6)

$$(4.8) \quad (\mathcal{G}^{-1}\mathcal{B}^*) (\mathcal{Q}^{-1}\mathcal{F}_p) \equiv (\mathcal{G}^{-1}\mathcal{F}) (\mathcal{G}^{-1}\mathcal{B}^*).$$

A simple rearrangement of (4.8) gives

$$\begin{aligned} (\mathcal{G}^{-1}\mathcal{F})^{-1} (\mathcal{G}^{-1}\mathcal{B}^*) &\equiv (\mathcal{G}^{-1}\mathcal{B}^*) (\mathcal{Q}^{-1}\mathcal{F}_p)^{-1} \\ \mathcal{F}^{-1}\mathcal{B}^* &\equiv \mathcal{G}^{-1}\mathcal{B}^* \mathcal{F}_p^{-1}\mathcal{Q}. \end{aligned}$$

Hence, assuming that (4.8) is valid, we have an alternative expression for the Schur complement operator $\mathcal{B}\mathcal{F}^{-1}\mathcal{B}^* : M_h \mapsto M_h$, namely

$$(4.9) \quad \mathcal{B}\mathcal{F}^{-1}\mathcal{B}^* \equiv \mathcal{B}\mathcal{G}^{-1}\mathcal{B}^* \mathcal{F}_p^{-1}\mathcal{Q}.$$

For the equivalence (4.9) to hold, it is necessary for the spaces \mathbf{X}_h and M_h to be defined with periodic boundary conditions. In the case of an enclosed flow boundary condition like (1.8), the discrete operator \mathcal{F}_p inherits natural boundary conditions (associated with the space M), and in this case (4.9) gives us a starting point for approximating the Schur complement matrix $S = BF^{-1}B^t$. Using the basis (2.16), we have the approximation

$$(4.10) \quad BG^{-1}B^tF_p^{-1}Q = P_S \approx S.$$

The goal now is to design an efficient implementation of a preconditioner based on (4.10). This requires that fast solvers for the underlying operators \mathcal{Q} and $\mathcal{B}\mathcal{G}^{-1}\mathcal{B}^*$ are available: we seek operators Q_* and H_* such that there exist constants $\theta, \Theta, \lambda, \Lambda$ independent of h , satisfying

$$(4.11) \quad \theta^2 \leq \frac{p^t Q p}{p^t Q_* p} \leq \Theta^2 \quad \forall p \in \mathbf{R}^m,$$

and

$$(4.12) \quad \lambda^2 \leq \frac{p^t B G^{-1} B^t p}{p^t H_* p} \leq \Lambda^2 \quad \forall p \in \mathbf{R}^m,$$

respectively. The practical version of the preconditioner is then defined by replacing the action of S^{-1} in the first step of (4.5) by the so called F_p approximation:

$$(4.13) \quad S_*^{-1} = Q_*^{-1} F_p H_*^{-1}.$$

Satisfying (4.11) is straightforward; the simple pressure scaling $Q_* = \text{diag}(Q)$ does the trick, see Wathen [31]. The upshot is that the action of Q^{-1} in (4.10) can be approximated very accurately using a fixed (small) number of steps of diagonally scaled conjugate gradient iteration applied to the operator Q .

The relation (4.12) can also be satisfied using a multigrid approach. The crucial point is that the use of a C^0 pressure approximation space is associated with an alternative inf-sup condition, see e.g. Bercovier & Pironneau [2]: for a stable mixed approximation there exists a constant β independent of h , such that

$$(4.14) \quad \sup_{\mathbf{v} \in \mathbf{X}_h} \frac{(\mathbf{v}, \nabla q)}{\|\mathbf{v}\|} \geq \beta \|\nabla q\| \quad \forall q \in M_h.$$

Thus, introducing the pressure Laplacian operator $\mathcal{A}_p : M_h \mapsto M_h$ such that

$$(\mathcal{A}_p q_h, r_h) = (\nabla q_h, \nabla r_h) \quad \forall q_h, r_h \in M_h,$$

we have that (4.14) is equivalent to

$$\beta(\mathcal{A}_p q_h, q_h)^{1/2} \leq \sup_{\mathbf{v}_h \in \mathbf{X}_h} \frac{(\mathbf{v}_h, \mathcal{B}^* q_h)}{\|\mathbf{v}_h\|} \quad \forall q_h \in M_h.$$

Applying the same arguments used to get (2.21) and (2.23), we have a natural characterisation in terms of the matrices associated with the finite element basis (2.16):

$$(4.15) \quad \beta^2 \leq \frac{p^t B G^{-1} B^t p}{p^t A_p p} \leq 1 \quad \forall p \in \mathbf{R}^m.$$

In simple terms, for a stable mixed discretisation, the operator $\mathcal{B}G^{-1}\mathcal{B}^*$ is spectrally equivalent to the Poisson operator \mathcal{A}_p defined on the pressure space M_h (with inherited Neumann boundary conditions); see e.g. Gresho and Sani [14, p. 563]. We note in passing that an equivalence of the form (4.15) can also hold in cases when a discontinuous pressure approximation is used (with an appropriately defined matrix operator A_p). For example, in the case of well known MAC discretisation on a square grid, we have $A_p = h^{-2}BB^t$ where A_p is the standard five-point Laplacian defined at cell centres.

The result (4.15) opens up the possibility of using a multigrid preconditioner. In particular, a single multigrid V-cycle with point Jacobi or (symmetric) Gauss-Seidel smoothing defines an approximation H_* , with spectral bounds

$$(4.16) \quad \kappa^2 \leq \frac{p^t A_p p}{p^t H_* p} \leq 1 \quad \forall p \in \mathbf{R}^m.$$

The combination of (4.15) and (4.16) shows that a simple multigrid cycle can be used as an approximation to $\mathcal{B}G^{-1}\mathcal{B}^*$ in the sense that (4.12) holds with constants $\lambda = \beta\kappa$ and $\Lambda = 1$.

To end this section we would like to emphasise the simplicity of the practical implementation of the preconditioner associated with (4.5). The computation of q in the first stage entails an approximation of the action of P_S^{-1} defined by (4.10). This is done in three steps; the first is the approximation to the action of the inverse of $BG^{-1}B^t$ using a multigrid iteration applied to a system with coefficient matrix A_p (typically representing a Poisson operator with Neumann boundary conditions), the second step is a matrix-vector product involving the discrete convection-diffusion operator F_p , and the third step is essentially a scaling step corresponding to the solution of a system with coefficient matrix given by the pressure mass matrix Q . For the second stage of (4.5), the computation of v is approximated by a multigrid iteration for the convection-diffusion equation. Clearly, the overall cost of the preconditioner is determined by the cost of a convection-diffusion solve on the velocity space and of a Poisson solve on the pressure space; with multigrid used for each of these, the complexity is proportional to the problem size.

5. Computational results. We use P_2 - P_1 mixed finite element approximation (see e.g. [14, pp. 462]), that is, we choose spaces

$$\begin{aligned}\mathbf{X}_h &= \{v \in H_0^1(\Omega) : v|_T \in \mathbb{P}^2(T) \quad \forall T \in \mathcal{T}_h\}, \\ M_h &= \{q \in H^1(\Omega) : q|_T \in \mathbb{P}^1(T) \quad \forall T \in \mathcal{T}_h\},\end{aligned}$$

where T is a triangle in the mesh \mathcal{T}_h . (This mixed method is shown to be *inf-sup* stable by Bercovier & Pironneau [2].) We restrict attention to uniformly refined meshes in this work, analogous results for adaptively refined meshes are given in Kay & Loghin [15].

We present results for three standard test flow problems below. The time discretisation is backward Euler, and the linearisation strategy is given by the choice $\mathbf{u}^* = \mathbf{u}^n$ in Algorithm 1. In all cases we run the time integrator for 15 timesteps, unless the stopping criterion $\|\mathbf{u}^{n+1} - \mathbf{u}^n\|_2 < 10^{-6}$ is satisfied. We solve the linear system that arises at each discrete time interval using GMRES with the preconditioner \mathcal{P} that is defined below. The GMRES starting vector for the n th timestep is always taken to be the previous timestep solution $(\mathbf{u}^{n-1}, p^{n-1})$. GMRES iterations are performed until the relative residual is reduced by 10^{-6} .

We will denote the action of a single multigrid V-cycle using a point Gauss-Seidel smoother for the discrete velocity operator \mathcal{F} in (2.11), by F_*^{-1} ; where we perform one smoothing sweep before a fine to coarse grid transfer of the residual, and one smoothing sweep after a coarse to fine grid transfer of the correction. For details see e.g., Wesseling [32]. Similarly we let H_*^{-1} denote the action of a single multigrid V-cycle using damped Jacobi as a smoother (with damping parameter 0.8) for the pressure Laplacian operator \mathcal{A}_p in (4.7) (again with a single sweep of pre- and post-smoothing).

We comment that although the use of multigrid as a solver for a Laplacian operator is very robust, using a simple multigrid cycle with point smoothing does not generally lead to an efficient solver for the convection-diffusion operator \mathcal{F} when convection dominates (although the same strategy can still be an effective preconditioner, see [32]). If we let Q_*^{-1} denote two diagonally scaled conjugate gradient iterations applied to the discrete pressure identity, then our inverse preconditioner is of the form:

$$\mathcal{P}_*^{-1} = \begin{pmatrix} F_*^{-1} & 0 \\ 0 & I \end{pmatrix} \begin{pmatrix} I & B^T \\ 0 & -I \end{pmatrix} \begin{pmatrix} I & 0 \\ 0 & Q_*^{-1} F_p H_*^{-1} \end{pmatrix}.$$

Within the multigrid process we construct prolongation operators using interpolation that is consistent with the order of the velocity/pressure approximation spaces. Furthermore the restriction operator is the usual transpose of the prolongation, and on the coarsest level ($h = 1/2$ below) we perform an exact solve. Finally, we emphasise that if the local mesh Péclet number is greater than unity on any grid, then streamline diffusion is included in the discrete system that is solved (as well as the discrete convection-diffusion problems defining the operator F_*^{-1} , see (2.26)).

To show the robustness of our solver we report below the maximum number of GMRES iterations required for the tolerance to be satisfied on a given mesh (with a given Δt) over all time iterations; this maximum iteration count is denoted by $N_{\Delta t}^h$.

5.1. Stokes: Driven cavity flow. We firstly consider the (symmetric-) generalised Stokes problem, associated with a standard driven cavity flow problem defined on a unit domain $\Omega = (0, 1) \times (0, 1)$. The associated boundary condition is given by

$$\mathbf{u}(\partial\Omega, t) = \begin{cases} (1, 0) & y = 1 \\ \mathbf{0} & \text{otherwise,} \end{cases}$$

and we “spin-up” to the steady state from the initial condition $\mathbf{u}(\mathbf{x}, 0) = \mathbf{0}$.

The performance of our preconditioned method is summarised in Table 5.1. These iteration counts are consistent with our expectation that the rate of convergence is independent of the degree of mesh refinement, and the size of the timestep. We note that in the limit $\Delta t \rightarrow \infty$, the system reduces to a stationary Stokes system in which case we have tight analytic bounds showing the effectiveness of the same preconditioning strategy in a MINRES context, see section 6.

5.2. Navier-Stokes: Driven cavity flow. We also consider the Navier-Stokes problem associated with the domain, boundary and initial conditions given above. These results are given in Table 5.2.

The obvious point to note here is that, as in the Stokes case, the performance is not affected by mesh refinement. (The trend is clearly evident even though the meshes are relatively coarse.) In contrast to the results in the Stokes case it can be seen that

Δt	$h = 1/4$	$h = 1/8$	$h = 1/16$
0.001	9	10	12
0.1	13	14	14
1	14	15	15
10	14	15	15
1000	14	15	15

TABLE 5.1

$N_{\Delta t}^h$ for Stokes driven cavity flow

$\nu = 1/50$	$h = 1/4$	$h = 1/8$	$h = 1/16$
$\Delta t = 0.1$	14	15	14
$\Delta t = 1$	14	15	15
$\Delta t = 10$	17	18	18
$\nu = 1/100$	$h = 1/4$	$h = 1/8$	$h = 1/16$
$\Delta t = 0.1$	14	15	14
$\Delta t = 1$	14	16	16
$\Delta t = 10$	19	21	21
$\nu = 1/200$	$h = 1/4$	$h = 1/8$	$h = 1/16$
$\Delta t = 0.1$	14	15	14
$\Delta t = 1$	15	18	18
$\Delta t = 10$	23	24	24

TABLE 5.2

$N_{\Delta t}^h$ for Navier-Stokes driven cavity flow

as Δt gets larger in Table 5.2, the iteration counts tend to an asymptotic maximum value. Moreover this maximum value becomes somewhat larger as ν is decreased. This behaviour is consistent with our expectations—steady-state iteration counts that are presented in [15] can be seen to slowly increase as the Reynolds number is increased. A complete theoretical explanation is not yet available, but see Elman et al. [7].

5.3. Navier-Stokes: Backward facing step. We finally consider a Navier-Stokes problem on an L-shaped domain. We start with the coarse (level 0) mesh in Figure 5.1, and generate subsequent meshes (i.e. levels 1–3) by successive uniform refinement. The total number of degrees of freedom on the respective levels 1, 2 and 3 are 309, 1092 and 4089 respectively. We again start from a “no flow” initial


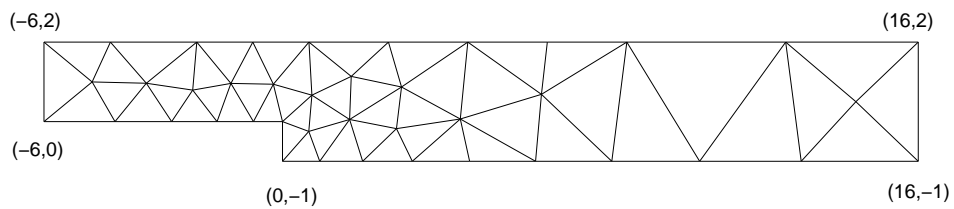


FIG. 5.1. Coarsest and finest grid triangulations for the backward facing step.

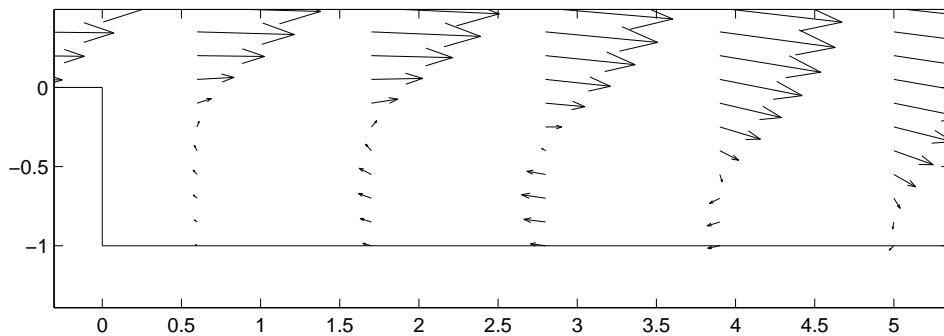



FIG. 5.2. Velocity solution for $\nu = 1/200$

condition, and impose the following enclosed flow boundary condition;

$$\mathbf{u}(\partial\Omega, t) = \begin{cases} (2y - y^2, 0) & x = -6, \\ (\frac{8}{27}(y + 1)(2 - y), 0) & x = 16, \\ \mathbf{0} & \text{otherwise.} \end{cases}$$

The fact that we have a tough outflow boundary condition is emphasised here. Figure 5.2 illustrates the computed steady flow (interpolated from the finest mesh) in the case $\nu = 1/200$, and shows that the downstream evolution from the inflow to the outflow profile is physically realistic.

$\nu = 1/50$	level 1	level 2	level 3
$\Delta t = 0.1$	26	32	33
$\Delta t = 1$	26	32	33
$\Delta t = 10$	26	43	40
$\nu = 1/100$	level 1	level 2	level 3
$\Delta t = 0.1$	26	32	33
$\Delta t = 1$	26	32	33
$\Delta t = 10$	26	51	47
$\nu = 1/200$	level 1	level 2	level 3
$\Delta t = 0.1$	26	32	33
$\Delta t = 1$	26	32	33
$\Delta t = 10$	33	64	59

TABLE 5.3

$N_{\Delta t}^h$ for Navier-Stokes flow over a backward facing step.

The maximum iteration counts are given in Table 5.3. These results have the same general character as those in Table 5.2, although the iteration counts for a given ν and Δt are increased by a factor of about two. We attribute this difference to the fact that the longer flow domain means that the local mesh Péclet number is relatively large in this case. We remark that for the largest timestep there is a reduction in the iteration count when going from the second to the third level of refinement. Indeed the average GMRES iteration counts in the case $\nu = 1/200$, $\Delta t = 10$ are 27.3, 52.3 and 50.1, respectively. This phenomenon of increased mesh refinement being correlated with faster convergence is also evident in the steady-state results that are presented in [15].

6. Analytic results. For problems where the coefficient matrix is symmetric, specifically whenever $N = 0$ in (2.17), there is a well-established convergence analysis associated with preconditioners based on the Schur complement approximation (4.10). We outline this theory in this final section.

As discussed in section 3, MINRES is the optimal Krylov solver in the case of a symmetric coefficient matrix \mathcal{L} , but it can only be used in conjunction with a symmetric positive definite preconditioning operator \mathcal{P} . For this reason, in place of the block triangular preconditioner (4.2), we introduce the simpler block diagonal variant

$$(6.1) \quad \mathcal{P}^{-1} = \begin{pmatrix} F_*^{-1} & 0 \\ 0 & S_*^{-1} \end{pmatrix},$$

and insist that the block-diagonal entries F_* and S_* are themselves symmetric. The convergence analysis is based on the following result, which is established by Silvester & Wathen in [23].

THEOREM 6.1. *Assume that the blocks F_* and S_* in (6.1) satisfy*

$$(6.2) \quad \lambda_F \leq \frac{u^t F u}{u^t F_* u} \leq \Lambda_F \quad \forall u \in \mathbf{X}_h,$$

$$(6.3) \quad \lambda_S \leq \frac{p^t B F^{-1} B^t p}{p^t S_* p} \leq 1 \quad \forall p \in M_h,$$

then the eigenvalues of the preconditioned problem,

$$(6.4) \quad \begin{pmatrix} F & B^t \\ B & 0 \end{pmatrix} \begin{pmatrix} \mathbf{u} \\ p \end{pmatrix} = \lambda \begin{pmatrix} F_* & 0 \\ 0 & S_* \end{pmatrix} \begin{pmatrix} \mathbf{u} \\ p \end{pmatrix},$$

lie in the union of intervals

$$(6.5) \quad E \equiv \left[\frac{1}{2}(\lambda_F - \sqrt{\lambda_F^2 + 4\Lambda_F}), \frac{1}{2}(\lambda_F - \sqrt{\lambda_F^2 + 4\lambda_S \lambda_F}) \right] \\ \cup \left[\lambda_F, \frac{1}{2}(\Lambda_F + \sqrt{\Lambda_F^2 + 4\Lambda_F}) \right].$$

We now consider two special cases; corresponding to potential flow and generalised Stokes flow, respectively.

6.1. Potential flow. In the simplest case of potential flow, $\nu = 0$ and $N = 0$ in (2.17) thus in (6.4) we have that $F = \frac{1}{\Delta t}G$, and the Schur complement matrix is $S = \Delta t B G^{-1} B^t$. Since F is simply a (scaled) velocity mass matrix, the choice of $F_* \equiv \frac{1}{\Delta t} \text{diag}(G)$ ensures that (6.2) holds with λ_F and Λ_F independent of h . For the Schur complement, we consider a preconditioner corresponding to (4.10) with $F_p = \frac{1}{\Delta t}Q$, and with $B G^{-1} B^t$ replaced by the spectrally equivalent operator A_p , that is we take

$$(6.6) \quad P_S = B G^{-1} B^t F_p^{-1} Q \simeq A_p F_p^{-1} Q = \Delta t A_p.$$

The bound (4.16) suggests that a practical choice for the preconditioner in (6.3) is $S_* = \Delta t H_*$ corresponding to a (symmetric) multigrid approximation to the inverse

of the pressure Poisson operator A_p . (With this choice of S_* the bounds (4.15) and (4.16) show that (6.3) holds with $\lambda_S = \beta^2 \kappa^2$.) Combining Theorems 3.1 and 6.1 then leads to the following result.

THEOREM 6.2. *In the case of a potential flow problem, MINRES iteration with a velocity scaling together with a simple multigrid preconditioning for the pressure Poisson operator, converges to a fixed tolerance in a number of iterations that is independent of the mesh size h , and the time step Δt .*

6.2. The Generalised Stokes Equations. We now consider eigenvalue bounds in the case $N = 0$ in (2.17) so that $F = \frac{1}{\Delta t}G + \nu A$ in (4.1). Since F is essentially a scaled vector-Laplacian plus an identity operator, it is well-known that multigrid can be used to generate an approximation F_* satisfying (6.2). For the Schur complement, we consider a preconditioner corresponding to (4.10) with $F_p = \frac{1}{\Delta t}Q + \nu A_p$, that is we take

$$\begin{aligned} P_S^{-1} &= (BG^{-1}B^t)^{-1}F_pQ^{-1} \\ &\simeq A_p^{-1}F_pQ^{-1} \\ (6.7) \quad &\equiv \frac{1}{\Delta t}A_p^{-1} + \nu Q^{-1}. \end{aligned}$$

The optimality of this combination is well established; see Cahouet & Chabard [3]. Using (6.7) we have that the Rayleigh quotient in (6.3) satisfies

$$(6.8) \quad \frac{p^t B F^{-1} B^t p}{p^t P_S p} = \frac{p^t B (\frac{1}{\Delta t}G + \nu A)^{-1} B^t p}{p^t (\frac{1}{\Delta t}A_p^{-1} + \nu Q^{-1})^{-1} p}.$$

This shows the importance of the inf-sup condition (2.21) in the limiting case of steady flow—for large Δt the quotient (6.8) reduces to the quotient in (2.21), (2.23), and it follows that (6.3) is satisfied with $\lambda_S = \gamma^2$ in the steady-state limit $\Delta t \rightarrow \infty$. Recent work by Bramble and Pasciak [1] has formally established that for finite Δt , the quotient (6.8) is bounded both above and below by constants independent of h and Δt , although careful consideration is required in the separate cases $\nu \Delta t < h^2$ and $\nu \Delta t \geq h^2$.

Our analysis in section 4 suggests that a practical version of the generalised Stokes preconditioner is given by (6.1) with:

$$(6.9) \quad S_* = \frac{1}{\Delta t}H_*^{-1} + \nu Q_*^{-1}.$$

The point here is that P_S is spectrally equivalent to S_* so that (6.3) is satisfied for the choice (6.9), in which case Theorem 6.1 implies that the intervals defining E in (6.5) are independent of h and Δt . This fact can be combined with Theorem 3.1 to establish the following convergence result (corroborated by the iteration counts presented in section 5.1);

THEOREM 6.3. *In the case of a generalized Stokes problem, preconditioned MIN-RES iteration with a simple multigrid cycle approximating a Helmholtz operator for each velocity component and a Poisson operator for the pressure, converges to a fixed tolerance in a number of iterations that is independent of the mesh size h , and the time step Δt .*

Acknowledgement. This is ongoing research and is supported by the EPSRC via grants GR/K91262 and GR/L05617 and by the U. S. National Science Foundation via grant DMS9972490.

REFERENCES

- [1] J. Bramble and J. Pasciak, Iterative techniques for time dependent Stokes problems. *Math. Applic.*, 33:13–30, 1997.
- [2] M. Bercovier and O.A. Pironneau. Error estimates for finite element method solution of the Stokes problem in the primitive variables. *Numer. Math.*, 33:211–224, 1977.
- [3] J. Cahouet and J.P. Chabard. Some fast 3D finite element solvers for the generalised Stokes problem. *Int. J. Numer. Meth. Fluids*, 8:869–895, 1988.
- [4] S. C. Eisenstat, H. C. Elman and M. H. Schultz. Variational iterative methods for nonsymmetric systems of linear equations. *SIAM J. Numer. Anal.*, 20:345–357, 1983.
- [5] H. Elman, Preconditioning for the steady state Navier-Stokes equations with low viscosity. *SIAM J. Sci. Comp.*, 20:1299–1316, 1999.
- [6] H. Elman and D. Silvester, Fast nonsymmetric iterations and preconditioning for Navier-Stokes equations. *SIAM J. Sci. Comp.*, 17:33–46, 1996.
- [7] H.C. Elman, D.J Silvester and A.J. Wathen. Performance and analysis of saddle point preconditioners for the discrete Navier-Stokes equations. In preparation.
- [8] V. Faber and T. A. Manteuffel. Necessary and sufficient conditions for the existence of a conjugate gradient method. *SIAM J. Numer. Anal.*, 21:352–362, 1984.
- [9] ———. Orthogonal error methods, *SIAM J. Numer. Anal.*, 24:170–187, 1987.
- [10] B. Fischer, A. Ramage, D. Silvester, and A. Wathen. On parameter choice and iterative convergence for stabilised discretisations of advection-diffusion problems. *Comput. Meth. Appl. Mech. Engrg.* 179:185–202, 1999.
- [11] R. Freund and N. M. Nachtigal. QMR: a quasi-minimal residual method for non-Hermitian linear systems. *Numer. Math.*, 60:315–339, 1991.
- [12] ———. A new Krylov-subspace method for symmetric indefinite linear systems. *Proceedings of the 14th IMACS World Congress on Computational and Applied Mathematics*, Ames, W.F., (Ed.), IMACS, 1253–1256, 1984.
- [13] V. Girault and P. A. Raviart. *Finite Element Methods for Navier-Stokes Equations—Theory and Algorithms*. Springer-Verlag, Berlin, 1986.
- [14] P.M. Gresho and R. Sani. *Incompressible Flow and the Finite Element Method*. Wiley, Chichester, 1998.
- [15] D. Kay and D. Loghin. A Green’s function preconditioner for the steady state Navier-Stokes equations. Oxford University Computing Laboratory Report 99/06, 1999, submitted to *SIAM J. Sci. Comp.*
- [16] D. Kay and D. Silvester, A posteriori error estimation for stabilised mixed approximations of the Stokes equations. Manchester Centre for Computational Mathematics Report 316, to appear in *SIAM J. Sci. Comp.*

- [17] C. Johnson. The streamline diffusion finite element method for compressible and incompressible flow. *Numerical Analysis 1989*, Griffiths, D.F. and Watson G.A. (Eds.), Longman Scientific, 155–181, 1989.
- [18] V. I. Lebedev. Iterative methods for solving operator equations with a spectrum contained in several intervals. *USSR Comput. Math. and Math. Phys.*, 9:17–24, 1969.
- [19] M.F. Murphy, G.H. Golub and A.J. Wathen. A note on preconditioning for indefinite linear systems. Oxford University Computing Laboratory Report 99/07, 1999, to appear in *SIAM J. Sci. Comp.*.
- [20] C. C. Paige and M. A. Saunders. Solution of sparse indefinite systems of linear equations. *SIAM J. Numer. Anal.*, 12:617–629, 1975.
- [21] Y. Saad and M. H. Schultz. GMRES: A generalized minimal residual algorithm for solving nonsymmetric linear systems. *SIAM J. Sci. Stat. Comput.*, 7:856–869, 1986.
- [22] D. Silvester and A. Wathen. Fast & robust solvers for time-discretised incompressible Navier-Stokes equations. *Numerical Analysis 1995*, Griffiths, D.F. and Watson G.A. (Eds.), Longman Scientific, 230–240, 1996.
- [23] ———. Fast iterative solution of stabilised Stokes systems part II: using general block preconditioners. *SIAM J. Numer. Anal.* 31:1352–1367, 1994.
- [24] J. Simo and F. Armero, Unconditional stability and long-term behavior of transient algorithms for the incompressible Navier-Stokes and Euler equations, *Comp. Meth. Appl. Mech. Eng.*, 111:111–154, 1994.
- [25] G. L. G. Sleijpen and D. R. Fokkema. BiCGSTAB(ℓ) for linear equations involving unsymmetric matrices with complex spectrum. *ETNA*, 1:11–32, 1993.
- [26] A. Smith and D. Silvester. Implicit algorithms and their linearisation for the transient Navier-Stokes equations. *IMA J. Numer. Anal.* 17:527–543, 1997.
- [27] P. Sonneveld. CGS, a fast Lanczos-type solver for nonsymmetric linear systems. *SIAM J. Sci. Stat. Comput.*, 10:36–52, 1989.
- [28] G. Stoyan. Towards discrete Veltre decompositions and narrow bounds for inf-sup constants. To appear in *Computers & Math. with Applics.*, 1999.
- [29] S. Turek. *Efficient Solvers for Incompressible Flow Problems*. Springer-Verlag, Berlin, 1999.
- [30] H. A. Van der Vorst. BI-CGSTAB: A fast and smoothly converging variant of BI-CG for the solution of nonsymmetric linear systems. *SIAM J. Sci. Stat. Comput.*, 10:631–644, 1992.
- [31] A.J. Wathen. Realistic eigenvalue bounds for the Galerkin mass matrix. *IMA J. Numer. Anal.* 7:449–457, 1987.
- [32] P. Wesseling. *An Introduction to Multigrid*. Wiley, 1991.
- [33] A. Wathen, B. Fischer and D. Silvester. The convergence rate of the minimal residual method for the Stokes problem. *Numer. Math.*, 71:121–134, 1995.
- [34] ———. The convergence of iterative solution methods for symmetric and indefinite linear systems. *Numerical Analysis 1997*, Griffiths, D.F., Higham D.J. and Watson G.A. (Eds.), Longman Scientific, 230–243, 1997.